

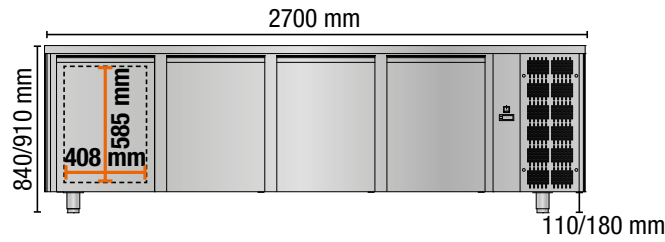


# TAVOLO REFRIGERATO MID PASTICCERIA

MID PASTRY refrigerated counter



**DX** Gruppo incorporato a destra / Built-in unit on the right side

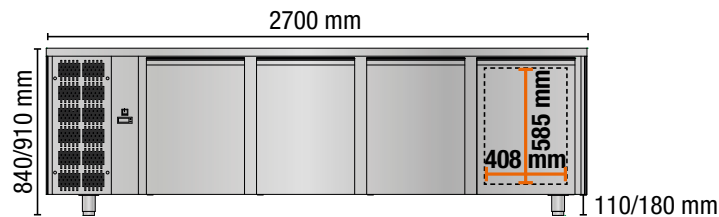

**SX** Gruppo incorporato a sinistra / Built-in unit on the left side

## TAVOLO MID PASTICCERIA / COUNTER MID PASTRY TP04MID

4 porte / 4 doors

<p><b>SP</b> Senza piano con sottopiano isolante <i>Without worktop with insulating underlay</i></p>	<p>Dimensioni (LxPxH) / Dimensions (LxDxH): 2700 x 800 x 800/870 mm</p>
<p><b>MID</b> Piano in acciaio inox <i>Stainless steel worktop</i></p>	<p>Dimensioni (LxPxH) / Dimensions (LxDxH): 2700 x 800 x 840/910 mm</p>
<p><b>AL</b> Piano in acciaio inox con alzatina <i>Stainless steel worktop with splashback</i></p>	<p>Dimensioni (LxPxH) / Dimensions (LxDxH): 2700 x 800 x 940/1010 mm</p>
<p><b>GRA</b> Piano in granito con sottopiano isolante <i>Granite worktop with insulating underlay</i></p>	<p>Dimensioni (LxPxH) / Dimensions (LxDxH): 2710 x 800 x 830/900 mm</p>
<p>Volume interno / Internal volume</p>	<p>883 Lt</p>
<p>Volume utile / Useful volume</p>	<p>544 Lt</p>
<p>Assorbimento all'avviamento / Starting electrical input</p>	<p>450 W / 2,8 A</p>
<p>Assorbimento a regime / Steady state electrical input</p>	<p>400 W / 2,4 A</p>
<p>Temperatura d'esercizio / Working temperature</p>	<p>+2°C / +8°C</p>
<p>Gas refrigerante / Cooling gas</p>	<p>R452A - R455A - <b>R290</b> (A richiesta / On request)</p>
<p>Classe climatica - Dati collaudo / Climatic class - Testing data</p>	<p>4 - Temperatura + 30°C / Umidità relativa 60% 4 - Temperature + 30°C / Relative humidity 60%</p>
<p>Alimentazione / Power supply</p>	<p>220 / 240 V - 1P - 50 Hz (60 Hz A richiesta / On request)</p>