




Total Food-Service Solutions

Modular Cooking - Amicus 600

Electric Wok Induction

NEWI 4-60 1AM

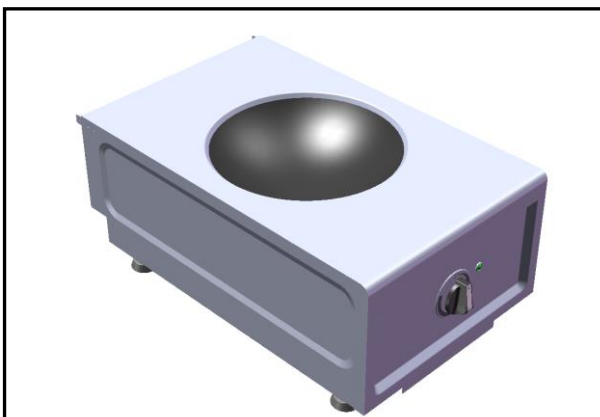

*Due to routine technical improvement, the photograph shown may not represent the latest design of the products.

AVAILABLE MODEL

1. NEWI 4-60 1AM

DESCRIPTION

Electric Wok Induction consists of 1 wok induction element of 3.5 kW power rate, suitable for 300 mm wok.

Unit to be installed on open cabinet or similar elements, cantilever, or solid block solutions. Featuring rear seamless fitting to Amicus family products.

ITEM# : _____

MODEL# : _____

NAME : _____

SN : _____

MAIN FEATURE

- High efficiency range.
- Induction glass is 6 mm with fast induction heating of 3.5 kW.
- Wok detection system, heating energy is emitted only when a wok is in contact with inductions.
- Low operating temperature emitted.
- IPX4 water protection.

CONSTRUCTION

- All exterior panels in 304 type of Stainless Steel
- Orbital top surface anti-scratch finishing.
- Top with 1.2 mm surface.
- Side with 1.2mm pressed surface.
- Front with 0.8 mm pressed surface.
- Adjustable ± 30 mm leg.

INCLUDED ACCESSORIES

- Clip Plate for Joining.

OPTIONAL ACCESSORIES


- Power cable.
- Stainless steel wok with 300 mm diameter.

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2017.11.04



Modular Cooking - Amicus 600
Electric Wok Induction
NEWI 4-60 1AM

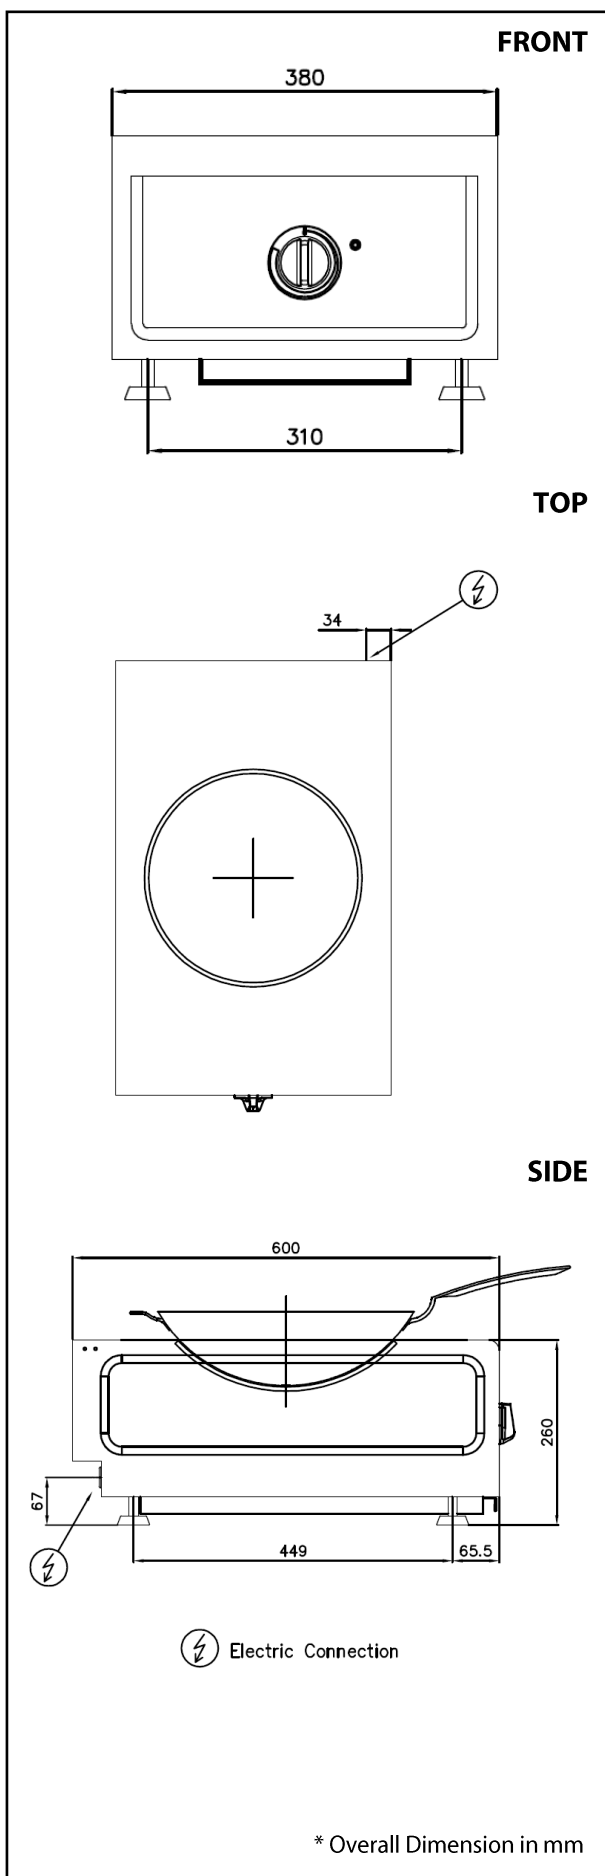

ELECTRIC

| | | |
|------------------------------------|---|-------------------------|
| Electrical rating (kW) | : | 3.5 |
| Element rating (kW) | : | 3.5 |
| Electrical supply voltage | : | 230V 1N |
| Required electrical supply (amps): | | 16 |
| Power cable | : | |
| ~ Cable type | : | H07RN-F |
| ~ Cable dimension | : | 3 x 2.5 mm ² |
| Electrical current split (amps) | : | L1: 16 |

KEY INFORMATION

| | | |
|----------------------|---|----------------------|
| Cooking surface | : | Ø 290 mm |
| Direct heat emission | : | 0.25 kW |
| Latent heat emission | : | 0.10 kW |
| Steam emission | : | 0.14 kg/h |
| Net weight | : | 23 kg |
| Shipping height | : | 395 mm |
| Shipping width | : | 450 mm |
| Shipping depth | : | 700 mm |
| Shipping volume | : | 0.124 m ³ |