

Modular Cooking – Meritus 750 Electric Wok Induction NEWI 6-75 (MR) SO 8 kW



*Due to routine technical improvement, the photograph shown may not represent the latest design of the products.

AVAILABLE MODEL

1. NEWI 6-75 (MR) SO 8 kW

DESCRIPTION

Electric Wok Induction with 8 kW power rate. Constructed of 300 mm coil diameter and 6 mm induction glass. Unit to be installed on cabinet or similar elements, cantilever, or solid block solutions. Featuring removable clip joint to connect Meritus family product.

ITEM#	:
MODEL#	:
NAME	:
SN	:

MAIN FEATURE

- Powerful 8 kW power rate.
- 6 mm Curved Wok Induction Glass
- 300 mm Coil Diameter.
- Stainless steel wok ring to prevent the cooking wok to damage the induction glass.
- Deep drawn top panel for maximum hygiene and operation.
- Unit to be installed free standing, can be joined with base cabinet, table stand or cantilever system.
- Service maintenance can be done from the front panel.

CONSTRUCTION

- All exterior panels in 304 type of Stainless Steel
- Orbital top panel anti-scratch finishing.
- Top and side are mounted by 1.5mm of Stainless Steel.
- Adjustable ±25 mm Stainless Steel leg.
- Certified IPX4 protection.

INCLUDED ACCESSORIES


N/A

OPTIONAL ACCESSORIES

Clip plate for joining

Electric Wok Inductio

FRONT 600 **O**.

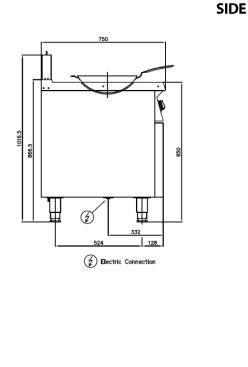

* Overall Dimension in mm

ELECTRIC

Electrical rating (kW) 8 Element rating (kW) 8

Electrical supply voltage 400V 3N

Required electrical supply (amps): 12

KEY INFORMATION

TOP

Unit Dimension (WxDxH) : 600x750x850/1016.5 mm

Cooking Surface Ø 300 mm

0.20 kW Direct heat emission

Latent heat emission 0.08 kW

Steam emission 0.12 kW

Net Weight 57 kg

PACKING DETAILS

Shipping width 670 mm

Shipping depth 850 mm

Shipping height 1230 mm

Shipping volume 0.7 m³

Gross Weight 73 kg

NEWI 6-75 (MR) SO 8 kW