



**Catalogue**  
**LAUNDRY**  
**Chapter**  
**WASHING MACHINES**

**Model**  
**LBS-100 TP2 E 400V 3N 50/60Hz**

19072295

**SANITARY BARRIER WASHER EXTRACTOR PULLMAN,LBS-100 TP2 E**


- Pullman-type axial separation drum, 2 compartments..
- New TP2 processor with two 7" screens, a touch screen for programming on the dirty linen loading side, and an information screen on the unloading side in the clean zone.
- External steel casing with grey coating (skinplate), stainless steel, easy to clean finish..
- 29 programs pre-set from factory.
- 3 water inlets.
- 8 signals for automatic liquid dosing, programmable in time and delay. 6 extra signals available optionally.
- Optimum load. Intelligent weighing system.
- Possibility of configuring three levels of savings.
- Loading and unloading doors. Door locks with safety opening.
- Automatic drum positioning with motor brake to facilitate the loading and unloading operation. Loading height: 960 mm.
- Electrical part to the left, mechanical to the right, connections at the top.
- Central drain.
- Technical menu. Statistics, alarms, autotest, data recovery for technicians and maintenance.
- Motor with variable-frequency drive incorporated.
- Prepared for Wet cleaning.
- Requires compressed air supply.
- Electric heating version
- 2 drum compartments with a single 900x500 mm useful opening door

**OPTIONS:**

- 6 extra dosage signals (XD)
- Titration Valve (TV)
- Stainless Steel Case (SSC)
- Traceability device (TZ)
- "- Wooden Maritime Packaging (WM)
- "

**DIMENSIONS**

X Width	1677 mm	X Gross width	1900 mm
Y Depth	1344 mm	Y Gross depth	1500 mm
Z Height	1960 mm	Z Gross height	2230 mm
Net Weight	1,900,0 kg	Gross Weight	1,958,0 kg
Net volume	4,420 m3	Gross volume	6,356 m3



**ELECTRICITY TECHNICAL SPECIFICATIONS**

Engine power	15,00 kW
Electric power	75,000 kW
Amperage (A)	125A
Heating power	60,00 kW
Voltage	400V - 3N
Electric frequency	50/60Hz

**WATER TECHNICAL SPECIFICATIONS**

Pressure	H2O: 200-400kPa(2-4bar)
Water max consumption	900,00 L/h

**CONNECTIONS TECHNICAL SPECIFICATIONS**

230 V three-phase wiring	4 X 35 / 160 A
Three-phase +N 400V wiring	5 X 25 / 125A
Water inlet diameter	1-1/4"
Drain 1 diameter	2X3"
Drainage capacity	320 l/min

**OTHERS**

Load capacity 1/9	100,00 kg
Load capacity 1/10	90,00 kg
Drum volume	900 L
Drum diameter	1050 mm
Drum depth	1032 mm
Drum compartments	2
Wash speed	45,0 r.p.m.
Max revolutions	750 r.p.m.
G Factor	325
Frequency of dynamic load (Hz)	13,00
Noise level	73,00 dB




Catalogue  
**LAUNDRY**

Chapter  
**WASHING MACHINES**

Model  
**LBS-100 TP2 E 400V 3N 50/60Hz**

19072295

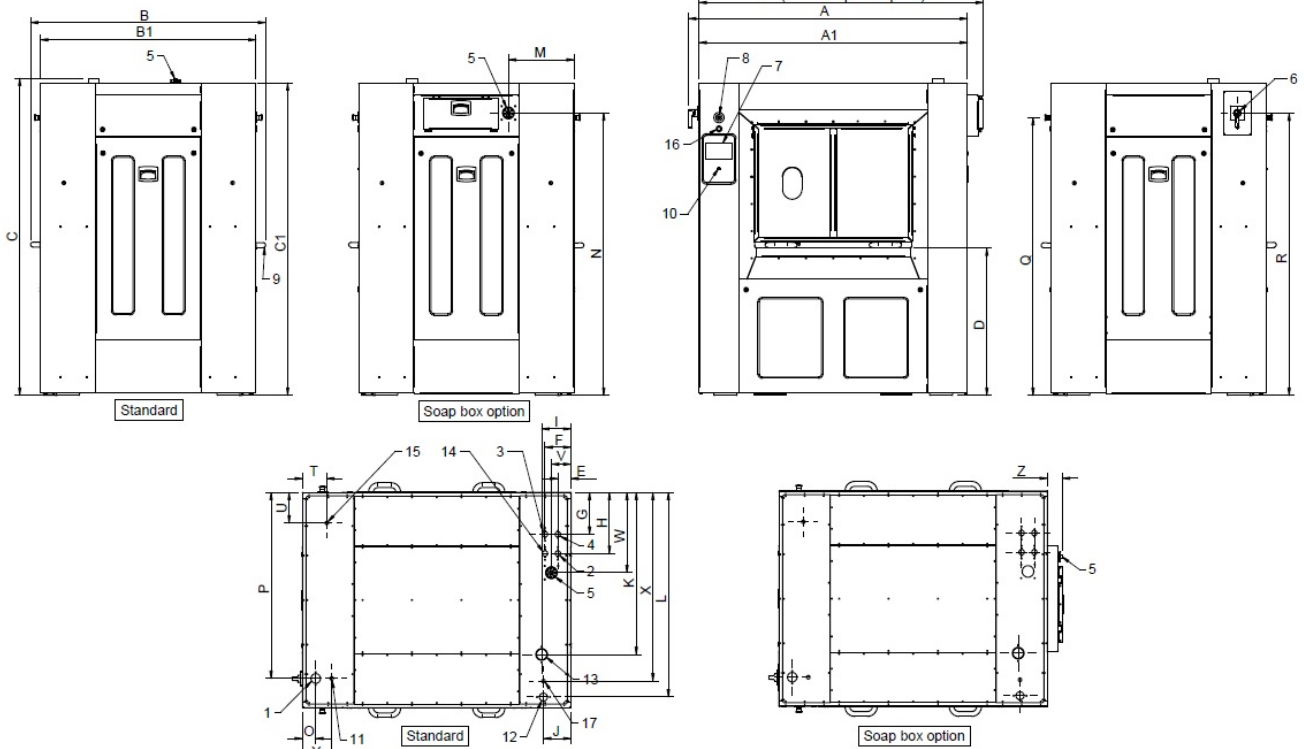

- 1 Conexión eléctrica
- 2 Agua fría
- 3 Agua descalcificada
- 4 Agua caliente
- 5 Entrada de productos líquidos
- 6 Interruptor general
- 7 Panel de control
- 8 Para de emergencia
- 9 Apertura de puerta
- 10 Puerto USB
- 11 Conexión bomba dosificadora
- 12 Entrada de vapor
- 13 Salida de vahos
- 14 Jabonera
- 15 Conexión de aire comprimido
- 16 Rotación manual del tambor
- 17 Aire comprimido válvula vapor

- 1 Connexion électrique
- 2 Eau froide
- 3 Eau adoucie
- 4 Eau chaude
- 5 Entrée produits liquides
- 6 Interrupteur principal
- 7 Panneau de commande
- 8 Bouton d'arrêt d'urgence
- 9 Ouverture porte
- 10 Port USB
- 11 Connexion pompes doseuses
- 12 Entrée vapeur
- 13 Event
- 14 Eau froide pour bac à produit
- 15 Connexion air comprimé
- 16 Rotation manuelle
- 17 Air comprimé vanne vapeur

- 1 Electrical connection
- 2 Cold water inlet
- 3 Soft water inlet
- 4 Hot water inlet
- 5 Liquid products inlet
- 6 Main switch
- 7 Control panel
- 8 Emergency stop
- 9 Door opening
- 10 USB Port
- 11 Dosing pumps connection Steam
- 12 inlet
- 13 Exhaust
- 14 Cold water detergent box
- 15 Compressed air connection
- 16 Manual drum rotation
- 17 Compressed air steam valve

	A	B	C	A1	B1	C1	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z
LBS-100TP2	1742	1468	1982	1677	1346	1954	921	82	162	262	382	183	172	1013	1279	410	1766	83	1163	1737	1765	1777	150	192	122	502	1179	183	92



**Catalogue**  
**LAUNDRY**  
**Chapter**  
**WASHING MACHINES**

**Model**  
**LBS-100 TP2 S 400V 3N 50/60Hz**

19072296

**SANITARY BARRIER WASHER EXTRACTOR PULLMAN, LBS-100 TP2 S**


- Pullman-type axial separation drum, 2 compartments..
- New TP2 processor with two 7" screens, a touch screen for programming on the dirty linen loading side, and an information screen on the unloading side in the clean zone.
- External steel casing with grey coating (skinplate), stainless steel, easy to clean finish..
- 29 programs pre-set from factory.
- 3 water inlets.
- 8 signals for automatic liquid dosing, programmable in time and delay. 6 extra signals available optionally.
- Optimum load. Intelligent weighing system.
- Possibility of configuring three levels of savings.
- Loading and unloading doors. Door locks with safety opening.
- Automatic drum positioning with motor brake to facilitate the loading and unloading operation. Loading height: 960 mm.
- Electrical part to the left, mechanical to the right, connections at the top.
- Central drain.
- Technical menu. Statistics, alarms, autotest, data recovery for technicians and maintenance.
- Motor with variable-frequency drive incorporated.
- Prepared for Wet cleaning.
- Requires compressed air supply.
- Steam heating version
- 2 drum compartments with a single 900x500 mm useful opening door

**OPTIONS:**

- 6 extra dosage signals (XD)
- Titration Valve (TV)
- Stainless Steel Case (SSC)
- Traceability device (TZ)
- "- Wooden Maritime Packaging (WM)
- "

**DIMENSIONS**

X Width	1677 mm	X Gross width	1900 mm
Y Depth	1344 mm	Y Gross depth	1500 mm
Z Height	1960 mm	Z Gross height	2230 mm
Net Weight	1,900,0 kg	Gross Weight	1,958,0 kg
Net volume	4,420 m3	Gross volume	6,356 m3



**ELECTRICITY TECHNICAL SPECIFICATIONS**

Engine power	15,00 kW
Electric power	15,000 kW
Amperage (A)	25A
Voltage	400V - 3N
Electric frequency	50/60Hz

**STEAM TECHNICAL SPECIFICATIONS**

Steam consumption	34,20 kg/h
-------------------	------------

**WATER TECHNICAL SPECIFICATIONS**

Pressure	H2O: 200-400kPa(2-4bar)
Water max consumption	900,00 L/h

**CONNECTIONS TECHNICAL SPECIFICATIONS**

230 V three-phase wiring	4 X 6 / 40A
Three-phase +N 400V wiring	5 X 6/ 40A
Steam entrance diameter	3/4"
Water inlet diameter	1-1/4"
Drain 1 diameter	2X3"
Drainage capacity	320 l/min

**OTHERS**

Load capacity 1/9	100,00 kg
Load capacity 1/10	90,00 kg
Drum volume	900 L
Drum diameter	1050 mm
Drum depth	1032 mm
Drum compartments	2
Wash speed	45,0 r.p.m.
Max revolutions	750 r.p.m.
G Factor	325
Frequency of dynamic load (Hz)	13,00
Noise level	73,00 dB




Catalogue  
**LAUNDRY**

Chapter  
**WASHING MACHINES**

Model  
**LBS-100 TP2 S 400V 3N 50/60Hz**

19072296

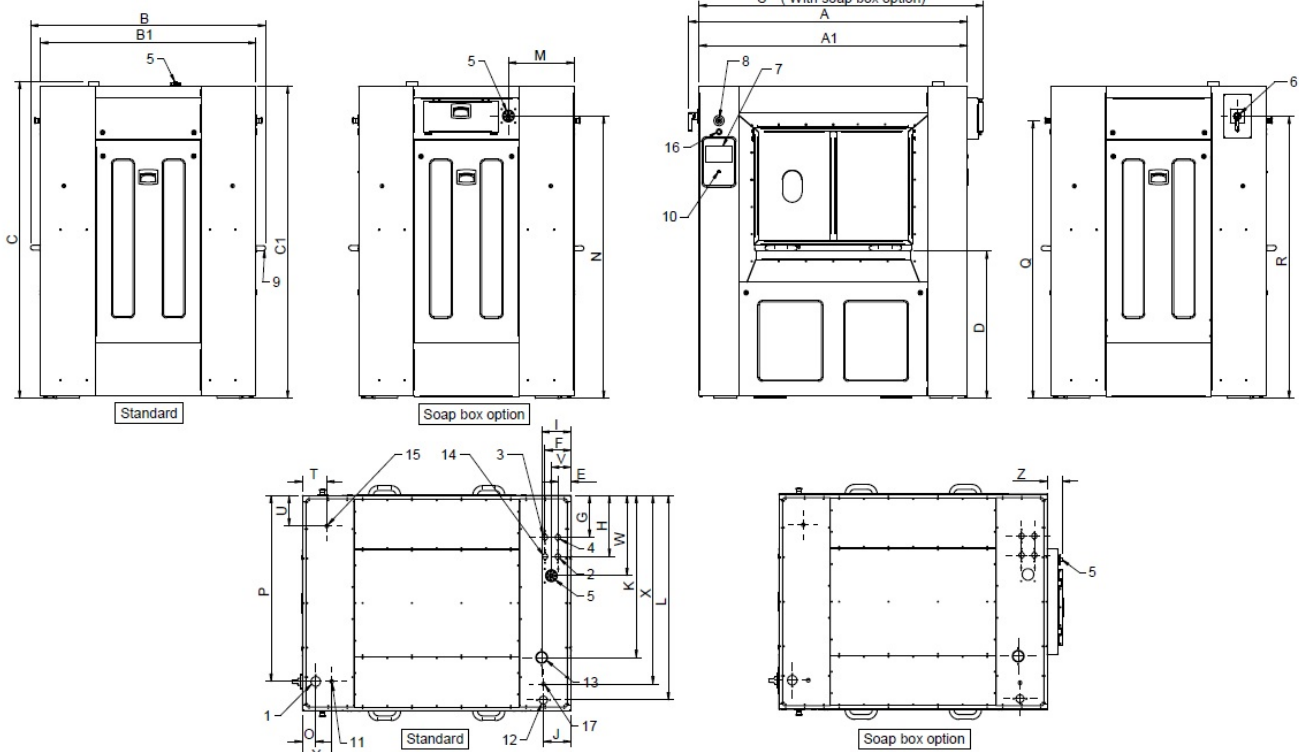

- 1 Conexión eléctrica
- 2 Agua fría
- 3 Agua descalcificada
- 4 Agua caliente
- 5 Entrada de productos líquidos
- 6 Interruptor general
- 7 Panel de control
- 8 Para de emergencia
- 9 Apertura de puerta
- 10 Puerto USB
- 11 Conexión bomba dosificadora
- 12 Entrada de vapor
- 13 Salida de vahos
- 14 Jabonera
- 15 Conexión de aire comprimido
- 16 Rotación manual del tambor
- 17 Aire comprimido válvula vapor

- 1 Connexion électrique
- 2 Eau froide
- 3 Eau adoucie
- 4 Eau chaude
- 5 Entrée produits liquides
- 6 Interrupteur principal
- 7 Panneau de commande
- 8 Bouton d'arrêt d'urgence
- 9 Ouverture porte
- 10 Port USB
- 11 Connexion pompes doseuses
- 12 Entrée vapeur
- 13 Event
- 14 Eau froide pour bac à produit
- 15 Connexion air comprimé
- 16 Rotation manuelle
- 17 Air comprimé vanne vapeur

- 1 Electrical connection
- 2 Cold water inlet
- 3 Soft water inlet
- 4 Hot water inlet
- 5 Liquid products inlet
- 6 Main switch
- 7 Control panel
- 8 Emergency stop
- 9 Door opening
- 10 USB Port
- 11 Dosing pumps connection Steam inlet
- 12 inlet
- 13 Exhaust
- 14 Cold water detergent box
- 15 Compressed air connection
- 16 Manual drum rotation
- 17 Compressed air steam valve

	A	B	C	A1	B1	C1	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z
LBS-100TP2	1742	1468	1982	1677	1346	1954	921	82	162	262	382	183	172	1013	1279	410	1766	83	1163	1737	1765	1777	150	192	122	502	1179	183	92