
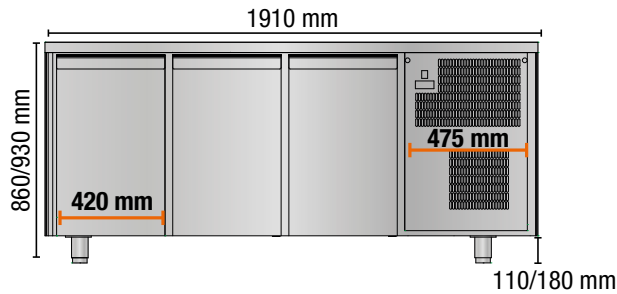


TAVOLO REFRIGERATO 60



Refrigerated counter 60



TAVOLO REFRIGERATO 60 / COUNTER 60

TF03MID60




3 porte / 3 doors

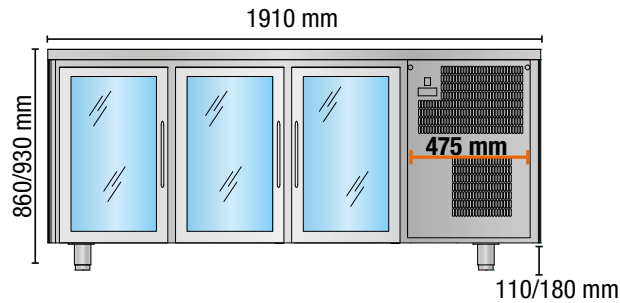

TAVOLO 60 / COUNTER 60

TF03MID60PV

3 porte / 3 doors - PV Porte vetro / Glass doors

 <p>SP Senza piano con sottopiano isolante <i>Without worktop with insulating underlay</i></p>	<p>Dimensioni (LxPxH) / Dimensions (LxDxH): 1910 x 590 x 820/890 mm</p>
 <p>60 Piano in acciaio inox con sottopiano isolante <i>Stainless steel worktop with insulating underlay</i></p>	<p>Dimensioni (LxPxH) / Dimensions (LxDxH): 1910 x 600 x 860/930 mm</p>
 <p>AL Piano in acciaio inox con alzatina e sottopiano isolante <i>Stainless steel worktop with splashback and insulating underlay</i></p>	<p>Dimensioni (LxPxH) / Dimensions (LxDxH): 1910 x 600 x 960/1030 mm</p>
Volume interno / Internal volume	541 Lt
Volume utile / Useful volume	300 Lt
Potenza assorbita dall'illuminazione (dotazione standard su PV) <i>Power consumption for lighting (standard set up for PV)</i>	2 per / for 4 W / 4000 K
Assorbimento all'avviamento / Starting electrical input	450 W / 2,8 A
Assorbimento a regime / Steady state electrical input	400 W / 2,4 A
Temperatura d'esercizio / Working temperature	+2°C / +8°C
Gas refrigerante / Cooling gas	R452A - R455A - R290 (A richiesta / On request)
Classe climatica - Dati collaudo / Climatic class - Testing data	4 - Temperatura + 30°C / Umidità relativa 60% 4 - Temperature + 30°C / Relative humidity 60%
Alimentazione / Power supply	220 / 240 V - 1P - 50 Hz (60 Hz A richiesta / On request)