



ACRV-751
ACCV-751



ACRV-1302
ACCV-1302



ACRV-2003
ACCV-2003

mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	estantes shelves	volumen capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W
ACRV-751	-2°C +8°C	695	2115	730	4	505	230V-50Hz	R134a R290*	245 502	264 260
ACCV-751	-20°C -15°C	695	2115	730	4	505	230V-50Hz	R290 R452A*	606 452	560 627
ACRV-1302	-2°C +8°C	1390	2115	730	8+4	1201	230V-50Hz	R134a R290*	485 820	461 542
ACCV-1302	-20°C -15°C	1390	2115	730	8+4	1201	230V-50Hz	R290 R452A*	907 1042	902 1010
ACRV-2003	-2°C +8°C	2090	2100	730	12+8	1852	230V-50Hz	R452A R290*	1215 1702	932 951
ACCV-2003	-20°C -15°C	2090	2100	730	12+8	1852	230V-50Hz	R290 R452A*	1470 1235	1410 1138


*optional - optional

Características técnicas y constructivas sujetas a variación sin previo aviso.

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Doble cristal + LEDS
- Estantes interiores de alambre en acero plastificado, regulables en altura
- Pies en tubo de acero inox ajustables en altura 135 - 210 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 32°C ambiente

We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Double glazed door + LEDS
- Shelves made of plasticized steel wire, height adjustable
- AISI -304 adjustable legs, 135 to 210 mm
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 32°C ambient

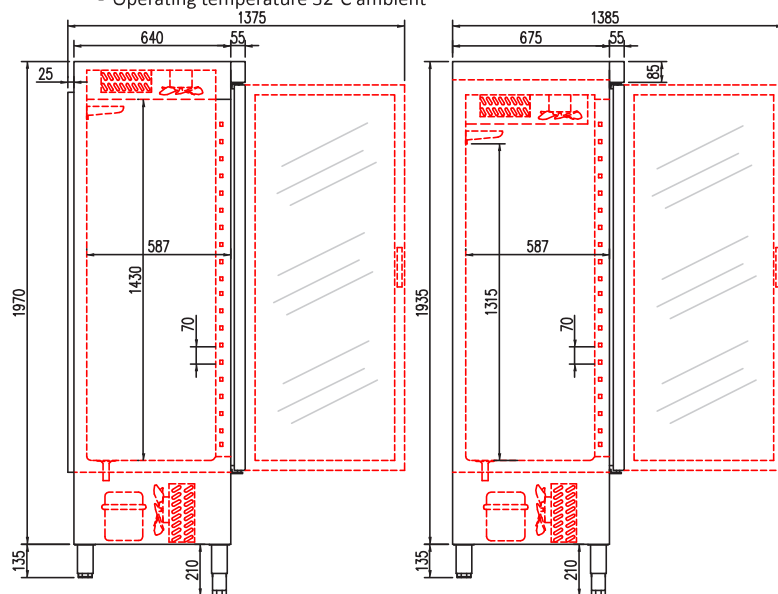


ACRV-751
ACRV-1302

ACRV-2003

all photos must be considered as a reference - fotografías no contractuales



ACRV-1302

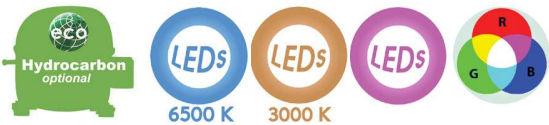

ACRV-751

