


**POUR 1 CHARIOT**  
18 niv. - 600x800 mm

**FOR 1 TROLLEY**  
18 lev. - 600x800 mm

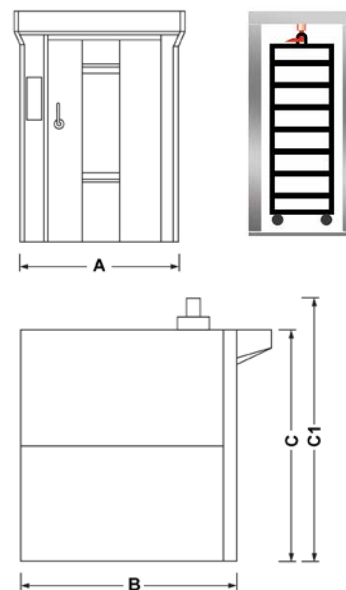

### FRP68-x

Energie : électrique, gaz ou fuel

Tableau de commande digital  
Affichage digital de la température  
Minuterie  
Générateur de vapeur  
Hotte dynamique intégrée

Fixation du chariot par crochet  
Moteur de rotation du chariot indépendant  
Thermostat de sécurité  
Vannes de détente  
Isolation laine de verre  
Façade inox  
Porte avec large hublot

Livré démonté, livré sans brûleur,  
livré sans chariot

#### OPTIONS

- Montage du four
- Brûleur fuel ou gaz
- Chariots
- Grilles - Filets - Plaques

### FRP68-x

Energy : electricity, gas or gasoil

Digital control panel  
Digital display for temperature  
Timer  
Steam generator  
Incorporated hood

#### Trolley fixing by hook system

Independent trolley motor  
Safety thermostat  
Expansion valves  
Glass wool insulation  
Stainless steel front side  
Door with with wide window

Supplied not assembled, supplied without burner,  
supplied without trolley

#### OPTIONS

- Assembling
- Gasoil or gas burner
- Trolleys
- Grids - Trays - Baking trays

	FRP68-RE	FRP68-RSB-G	FRP68-RSB-F
<b>Energie / Energy</b>	Electricité / Electricity	Gaz / Gas	Fuel / Gasoil
<b>Dimensions / Dimensions</b>			
A mm	1360	1460	1460
B mm	1960	2230	2230
C mm	2200	2300	2300
C1 mm	2430	2650	2650
<b>Poids / Weight</b>			
Kg	1200	1250	1250
<b>Puissance totale à installer / Total power to install</b>			
Electrique / Electricity	48 kW	3.5	3.5
Thermique / Thermal	-	63700 Kcal/h	63700 Kcal/h
	-	74 kW/h	74 kW/h
	-	252700 BTU/h	252700 BTU/h
	-	266400 Kj/h	266400 Kj/h
<b>Consommation théorique / Theoretical consumption</b>			
GPL (37mBar)	-	5.8 Kg/h - 2.9 Kg/h	-
Gaz méthane / Methane gas	-	7.1 m3/h - 3.5 m3/h	-
Fuel / Gasoil	-	-	8 L/h - 4 L/h
<b>Voltage / Voltage</b>	TRI - 230/400V - 50/60Hz		