



## ENFRIADORES DE AGUA EAP-175V EAP-100-H



**docriluc**

Ctra. Córdoba - Málaga Km. 75,8  
Tlfs: +34 957 510 126 Fax: +34 957 510 682  
14900 LUCENA (Córdoba), Spain  
[info@docriluc.es](mailto:info@docriluc.es)  
[www.docriluc.es](http://www.docriluc.es)



GENERAL CATALOGUE


### CARACTERÍSTICAS GENERALES

- EAPI Exterior en acero inox AISI 304.
- EAP Exterior en acero plastificado blanco.
- Serpentin evaporador interior en acero inox AISI 304.
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m<sup>3</sup>, bajo GWP y cero efecto ODP (Espesor 60mm)
- Llenado automático por boya, diametro 1/2"
- Agitador de agua interior
- Control digital electrónico.
- Encimera desmontable.
- Rebosadero de seguridad diametro 3/4"


### GENERAL FEATURES

- EAPI Exterior in AISI 304 stainless steel.
- EAP white plastic coated steel exterior.
- AISI 304 stainless steel Internal evaporator coil
- Injected polyurethane insulation, density 40 Kg/m<sup>3</sup>, low GWP and zero ODP effect (60mm thickness)
- Automatic fill, float system, 1/2" diameter
- Interior water shaker
- Digital electronic control.
- "Trop plein" security, diameter 3/4"

### SECCIONES

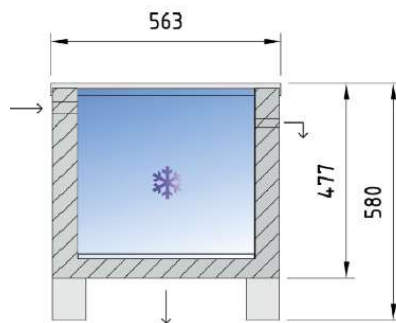


### SECTIONS

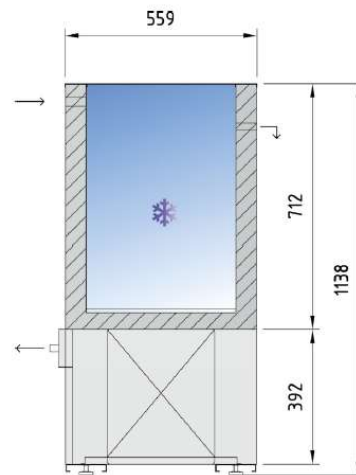


### VISTAS PLANTA

EAP-100-H

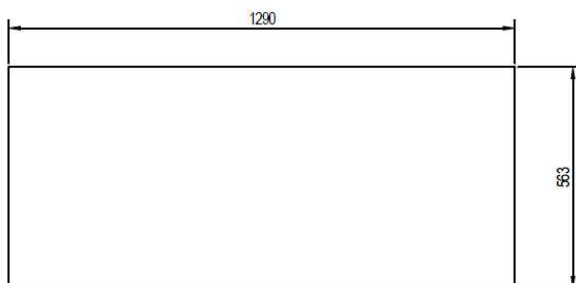

### FLOOR VIEWS

EAP-175-V

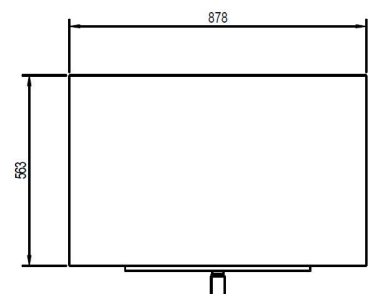

### DATOS TÉCNICOS TECHNICAL INFORMATION

Modelo / Model	EAP-175-V	EAP-100-H
Rango temperatura / Temperatura Range	+1°C / +3°C	+1°C / +3°C
Medidas exteriores / External dimensions (LxWxH)mm	880 x 1140 x 560	1405 x 580 x 565
Medidas embaladas / Packed dimensions (LxWxH)mm	1132 x 1270 x 680	1425 x 720 x 635
Caudal grifo abierto (l/h) $\Delta T=10^{\circ}C$ / Open flow faucet (l/h) $\Delta T=10^{\circ}C$	110	79
Peso neto / Net Weight	103	100
Capacida / Capacity (L)	175	100
Consumo Energético / Energy consumption (W)	594	346
Tensión - Frecuencia / Tension Frequency	230V 50/60 Hz	230V 50/60 Hz
Refrigerante / Refrigerant	R-290	R-290
Agente expansor / Expanding agent	HFO	HFO
Tipo evaporación / Evaporation type	Estática	Estática
Tipo condensación / Condensation type	Ventilada	Ventilada
Controlador / Controller	Carel PJEASY	Carel PJEASY
Nº Mangueras / Num. Of power cord	1	1

**docriluc**

Ctra. Córdoba - Málaga Km. 75,8  
Tlfs: +34 957 510 126 Fax: +34 957 510 682  
14900 LUCENA(Córdoba), Spain

[info@docriluc.es](mailto:info@docriluc.es)  
[www.docriluces.com](http://www.docriluces.com)



GENERAL CATALOGUE