



Total Food-Service Solutions

Modular Cooking – Grandis 900

Electric Bain Marie

NEBM 6-90 GR



*Due to routine technical improvement, the photograph shown may not represent the latest design of the products.

AVAILABLE MODEL

1. NEBM 6-90 GR

DESCRIPTION

Electric Bain Marie with 2 kW power rate. Water temperature maintained by thermostat with maximum working temperature of 90°C.

Unit to be installed on open cabinet or similar elements, cantilever, or solid block solutions. Featuring removable clip joint to connect Grandis family product.

ITEM# : _____

MODEL# : _____

NAME : _____

SN : _____

MAIN FEATURE

- Heating system by silicon heating element
- Fitted for 2 GN 1/1 Pan
- Maximum working temperature of 90°C.
- H2 Cabinet Finishing
- Manual refill of water in the basin
- Removable food pan
- Fully welded basin with water level marks
- Bowl with 200 mm of depth.

CONSTRUCTION

- All exterior panels in 304 type of Stainless Steel
- Orbital top panel anti-scratch finishing.
- Top with 2.0 mm thick surface.
- Side with 0.8 mm thick surface.
- Adjustable ± 25 mm Stainless Steel leg.

INCLUDED ACCESSORIES

- Drain Plug

OPTIONAL ACCESSORIES


- Clip Plate for Joining
- Food Pan G/N

: _____


The company reserves the right to make modifications to the products without prior notice.
All information correct at time of printing.
2018.07.25




FRONT

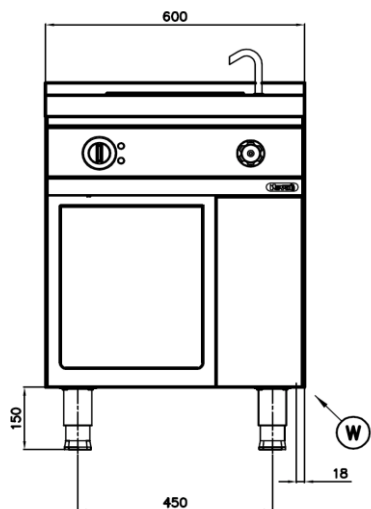

TOP

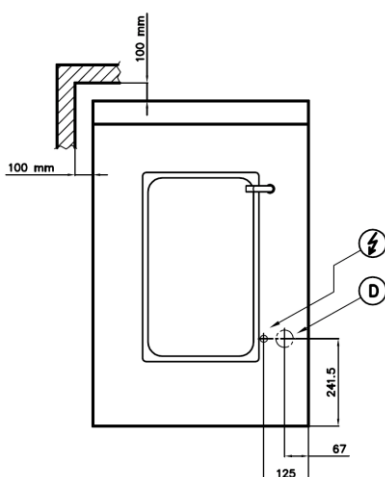

SIDE

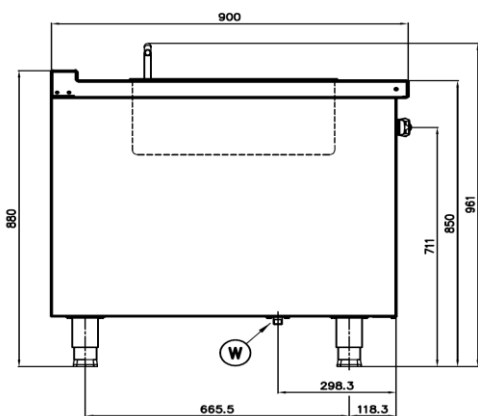

-  Electric Connection
-  Water Connection R 1/2"
-  Drainage R 1 1/2"

* Overall Dimension in mm

ELECTRIC

Electrical rating (kW)	:	2 kW
Element rating (kW)	:	2 kW
Electrical supply voltage	:	230V 1N
Required electrical supply (amps):	:	9
Electrical current split (amps)	:	L1: 9

KEY INFORMATION

Cooking surface width	:	310 mm
Cooking surface depth	:	510 mm
Direct heat emission	:	0.25 kW
Latent heat emission	:	0.40 kW
Steam emission	:	0.59 kg / h
Min. working temperature	:	30°C
Max. working temperature	:	90°C
Water Inlet	:	R 1/2"
Drain Valve	:	R 1 1/2"
Net weight	:	52 Kg
Shipping height	:	1020 mm
Shipping width	:	655 mm
Shipping depth	:	995 mm
Shipping volume	:	0.665 m ³