


ACRV-751  
ACCV-751

ACRV-1302  
ACCV-1302

ACRV-2003  
ACCV-2003

| mod.      | rango<br>range<br>°C | largo<br>length<br>(mm) | alto<br>height<br>(mm) | fondo<br>depth<br>(mm) | estantes<br>shelves | volumen<br>capacity<br>(L) | voltaje<br>voltage | refrigerante<br>refrigerant | potencia frig.<br>frig. power<br>W | potencia<br>power<br>W |
|-----------|----------------------|-------------------------|------------------------|------------------------|---------------------|----------------------------|--------------------|-----------------------------|------------------------------------|------------------------|
| ACRV-751  | -2°C<br>+8°C         | 695                     | 2115                   | 730                    | 4                   | 505                        | 230V-50Hz          | R134a                       | 245                                | 264                    |
| ACCV-751  | -20°C<br>-15°C       | 695                     | 2115                   | 730                    | 4                   | 505                        | 230V-50Hz          | R290*                       | 502                                | 260                    |
| ACRV-1302 | -2°C<br>+8°C         | 1390                    | 2115                   | 730                    | 8+4                 | 1201                       | 230V-50Hz          | R290                        | 606                                | 560                    |
| ACCV-1302 | -20°C<br>-15°C       | 1390                    | 2115                   | 730                    | 8+4                 | 1201                       | 230V-50Hz          | R452A*                      | 452                                | 627                    |
| ACRV-2003 | -2°C<br>+8°C         | 2090                    | 2100                   | 730                    | 12+8                | 1852                       | 230V-50Hz          | R134a                       | 485                                | 461                    |
| ACCV-2003 | -20°C<br>-15°C       | 2090                    | 2100                   | 730                    | 12+8                | 1852                       | 230V-50Hz          | R290*                       | 820                                | 542                    |
|           |                      |                         |                        |                        |                     |                            |                    | R290                        | 907                                | 902                    |
|           |                      |                         |                        |                        |                     |                            |                    | R452A*                      | 1042                               | 1010                   |
|           |                      |                         |                        |                        |                     |                            |                    | R452A                       | 1215                               | 932                    |
|           |                      |                         |                        |                        |                     |                            |                    | R290*                       | 1702                               | 951                    |
|           |                      |                         |                        |                        |                     |                            |                    | R290                        | 1470                               | 1410                   |
|           |                      |                         |                        |                        |                     |                            |                    | R452A*                      | 1235                               | 1138                   |


\*optional - optional

Características técnicas y constructivas sujetas a variación sin previo aviso.

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Doble cristal + LEDS
- Estantes interiores de alambre en acero plastificado, regulables en altura
- Pies en tubo de acero inox ajustables en altura 135 - 210 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 32°C ambiente

We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Double glazed door + LEDS
- Shelves made of plasticized steel wire, height adjustable
- AISI -304 adjustable legs, 135 to 210 mm
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 32°C ambient

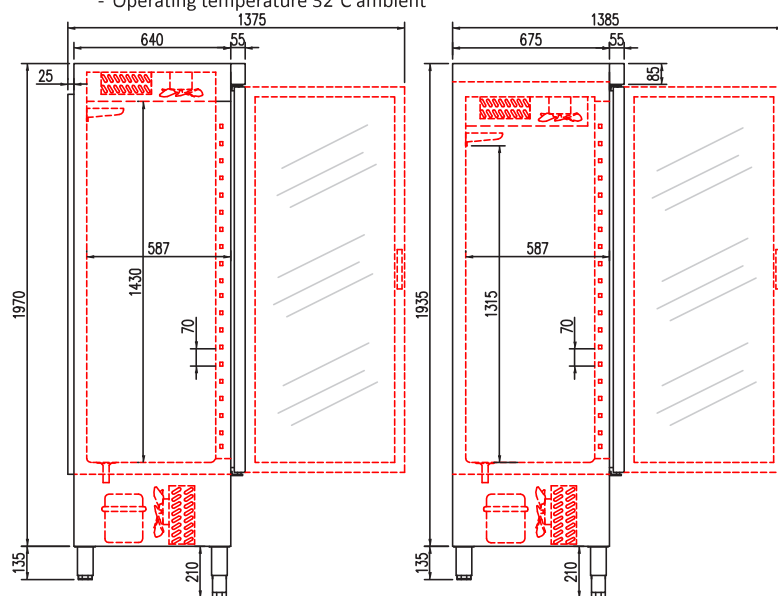
ACRV-751  
ACRV-1302


ACRV-2003

| OPCIONES                      | OPTIONS                   | € |
|-------------------------------|---------------------------|---|
| parrilla reforzada botelleria | bottles reinforced shelf  |   |
| parrilla adicional            | extra shelf               |   |
| parrilla intermedia adicional | extra middle shelf        |   |
| cerradura puerta cristal      | glass door lock           |   |
| barras carniceras             | bars for meat set         |   |
| set 4 ruedas                  | 4 castors set             |   |
| set 6 ruedas                  | 6 castors set             |   |
| registrador de alarmas HACCP  | HACCP alarm recorder      |   |
| cambio R134a por R290         | R134a to R290             |   |
| cambio R290 por R452A         | R290 to R452A             |   |
| respaldo inox                 | stainless steel rear side |   |
| 230v 60Hz / 115v 60Hz         | 230v 60Hz / 115v 60Hz     |   |

all photos must be considered as a reference - fotografías no contractuales



ACRV-1302

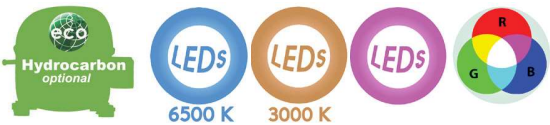

ACRV-751

