



Catalogue
CATERING

Chapter
COOKING

Model
F-E9221 R 380-415V 3N 50/60Hz 4C

19048314

12/06/2018

DIMENSIONS

	<u>Article</u>		<u>Packed</u>	
Lenght	800	mm	840	mm
Depth	930	mm	1022	mm
Height	850	mm	1125	mm
Weight	140,000	kg	160,000	kg
Volume	0,722	m3	0,966	m3

ELECTRICITY

Electric power	36,00	kw
Voltage	380-415V -3N	
Three-phase +N 400V wiring	2X(4X4MM2+T)	
Frequency	50/60	hz

ELECTRIC DEEP FAT FRYER, F-E9221

Fryers are designed to deep fry large amounts of product (chips, croquettes, different types of dredgings, etc.).

2 mm stainless AISI-304 steel top with rounded edges for easy cleaning.

Laser cut and automatic welding for a perfect adjustment of sides between modules with square angle finish.

Number of wells: 2.

Well capacity: 21 litres.

Standard equipment: Four 132x338x132 mm baskets.

Well integrated in the top, with cool area at the bottom. This helps to maintain oil properties and quality for a longer time.

Heating by means of AISI 304 stainless steel electrical resistances inside the well. They can be tilted more than 90° for a perfect cleaning.

High power/litre rate: 0.857 kW per litre.

Thermostat for temperature control (between 60 and 200°C).

Safety thermostat.

Oil discharge through robust and reliable high temperature resistant ball tap.

Fitted with independent lids for each well.

Basket drainage support at the back of the well.

Water-tight and protecting-support controls.

High temperature protector for the chimney made of enamelled cast iron.

Front access to components.

According to European standards for components and panels temperature, efficiencies and combustion, and sanitary regulations (EN-60335 and EN-203)

IPX5 grade water protection equipment.



Catalogue
CATERING


Chapter
COOKING

Model
F-E9221 R 380-415V 3N 50/60Hz 4C

19048314

12/06/2018

F-E9215 & F-E9221

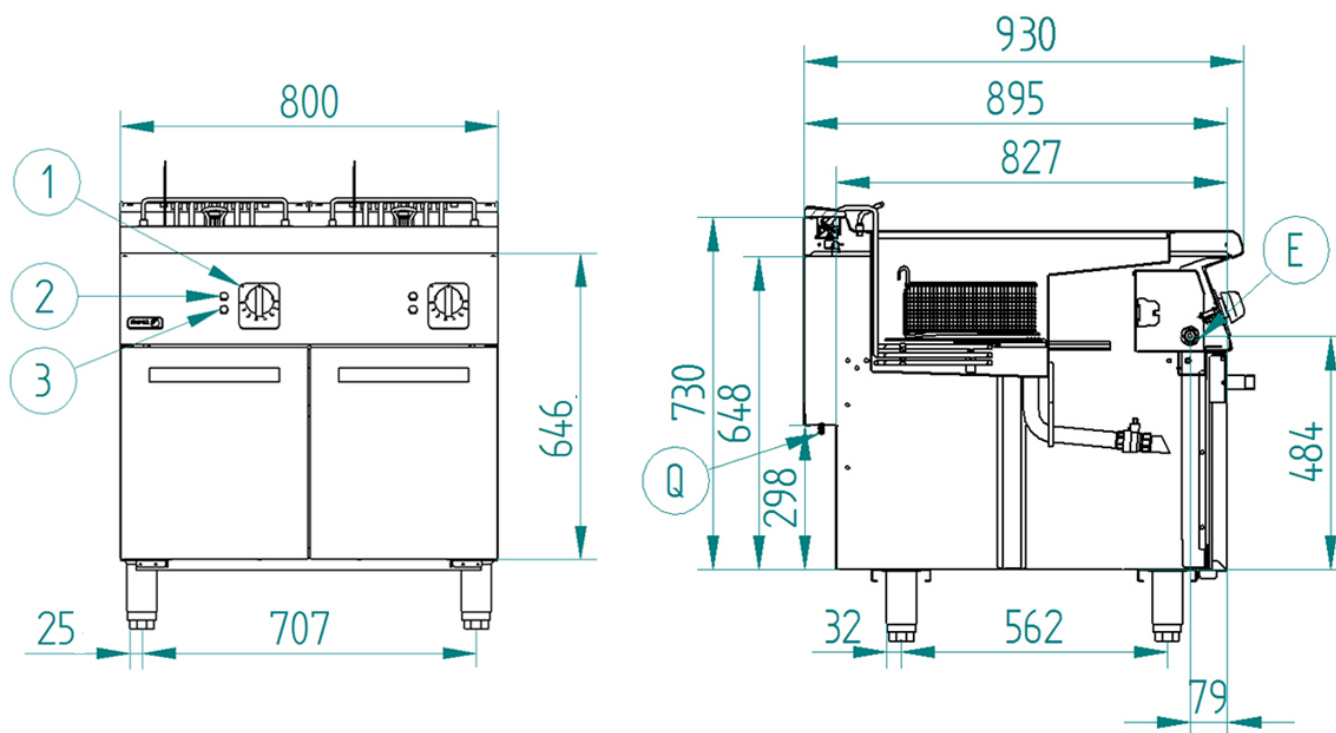

E – Conexión eléctrica
Q – Conexión equipotencial
1 – Mando termostato
2 – Piloto verde
3 – Piloto ambar

Electrical connection
Equipontecial connection
Thermostat control
Green pilot
Ambar pilot