




Total Food-Service Solutions

## Modular Cooking - Amicus 600

### Electric Griddle Pan

#### NEGP 4-60 AM

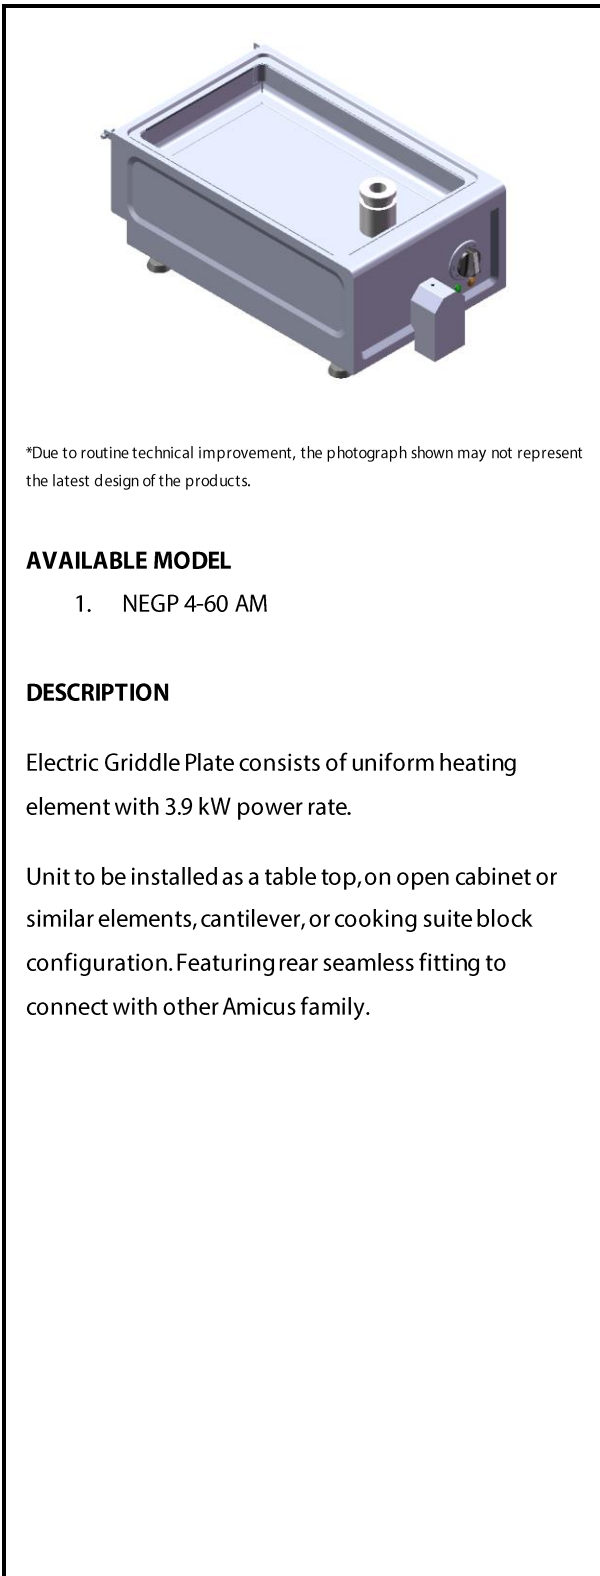

\*Due to routine technical improvement, the photograph shown may not represent the latest design of the products.

#### AVAILABLE MODEL

1. NEGP 4-60 AM

#### DESCRIPTION

Electric Griddle Plate consists of uniform heating element with 3.9 kW power rate.

Unit to be installed as a table top, on open cabinet or similar elements, cantilever, or cooking suite block configuration. Featuring rear seamless fitting to connect with other Amicus family.

ITEM# : \_\_\_\_\_

MODEL# : \_\_\_\_\_

NAME : \_\_\_\_\_

SN : \_\_\_\_\_

#### MAIN FEATURE

- Multipurpose cooking: braising, grilling, warming, etc.
- 3.9 kW powered by SSS (Steady State Surface) heating system.
- 16 mm SS 420 griddle (Knife Steel).
- Full welded griddle for optimum hygienic operation.
- Griddle temperature is thermostat controlled from 50°C - 300°C.
- Griddle is constructed with rounded corner for ease of cleaning.
- IPX4 water protection.

#### CONSTRUCTION

- All exterior panels in 304 type of Stainless Steel
- Orbital top surface anti-scratch finishing.
- Top with 1.2 mm surface.
- Side with 1.2mm pressed surface.
- Front with 0.8 mm pressed surface.
- Adjustable ±30 mm leg.

#### INCLUDED ACCESSORIES


- Drain Plug
- Clip Plate for Joining.
- Power cable

#### OPTIONAL ACCESSORIES

\_\_\_\_\_

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.  
2019.08.26



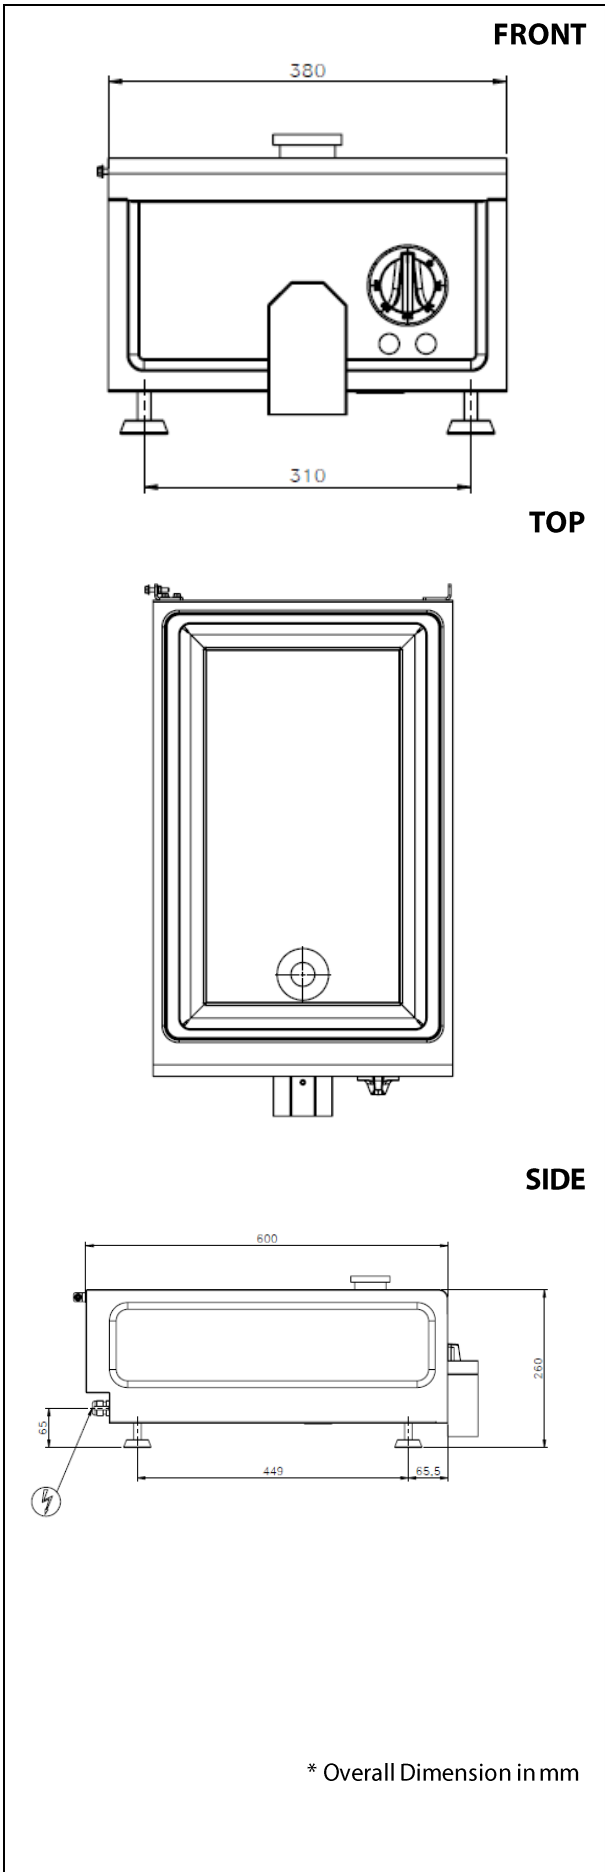

**ELECTRIC**

Electrical rating (kW)	:	3.9
Element rating (kW)	:	3.9
Electrical supply voltage	:	230V 1N
Required electrical supply (amps):		18
Power cable	:	
~ Cable type	:	H07RN-F
~ Cable dimension	:	3 x 2.5 mm <sup>2</sup>
Electrical current split (amps)	:	L1: 18

**KEY INFORMATION**

Unit dimension (WxDxH)	:	380x600x260 mm
Cooking surface (WxD)	:	310x480 mm
Direct heat emission	:	1.3 kW
Latent heat emission	:	1.6 kW
Steam emission	:	2.3 kg / h
Food discharge	:	2"
Working temperature	:	50°C-3000°C
Net weight	:	22.5 kg

**PACKING DETAILS**

Shipping width	:	470 mm
Shipping depth	:	710 mm
Shipping height	:	420 mm
Shipping volume	:	0.14 m <sup>3</sup>
Gross weight	:	26.5 kg