



Total Food-Service Solutions

Modular Cooking – Meritus 750
Electric Noodle Boiler with Auto-Lifter
NEN 26 AL (MR)



*Due to routine technical improvement, the photograph shown may not represent the latest design of the products.

AVAILABLE MODEL

- 1. NEN 26 AL (MR)

DESCRIPTION

Electric Noodle Boiler made of stainless steel that can withstand to salt and acid. It uses of 10.8 kW power rate. This appliance is suitable for cooking noodle. It is equipped with single tank for 27 liters water capacity, six auto lifters (actuators) and six baskets with two control panels for auto lifter. Unit to be installed free standing. Featuring removable clip joint to connect Meritus family product.

ITEM# : _____
MODEL# : _____
NAME : _____
SN : _____

MAIN FEATURE

- Maximum working boiling temperature of 100°C.
- Basin made of SS 304.
- Unit to be installed free standing.
- Service maintenance can be done from the front panel.
- Water knob and faucet to refill water in the basin. included.

CONSTRUCTION

- All exterior panels in 304 type of Stainless Steel
- Orbital top panel anti-scratch finishing.
- Top and side are mounted by 1.5mm of Stainless Steel.
- Adjustable ±25 mm Stainless Steel leg.
- Certified IPX4 protection.

INCLUDED ACCESSORIES

- Noodle Basket.
- Noodle Basket Holder.
- Splashback

OPTIONAL ACCESSORIES


- Clip plate for joining
- Auto-Lifter Basket

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.
2018.10.25




Modular Cooking – Meritus
Electric Noodle Boiler with Auto Lifter
NEN 26 AL (MR)


FRONT

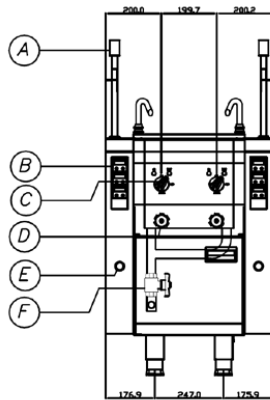

TOP

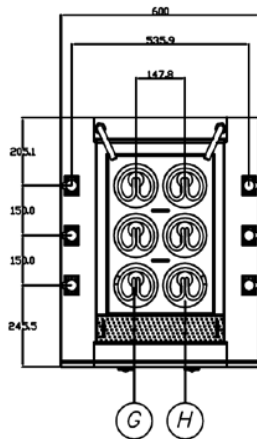

SIDE

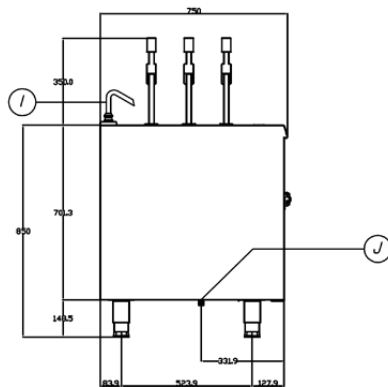

- | | |
|--------------------------------------|-----------------|
| A . Actuator (Basket Lifter) | G . Heater |
| B . Control Panel | H . Bowl |
| C . Switch Control Heater | I . Faucet |
| D . Water Tap | J . Water Inlet |
| E . Switch Button (On/Off for timer) | K . Faucet |
| F . Drain Valve | |

* Overall Dimension in mm

ELECTRIC (BOILER)

Electrical rating (kW)	:	13.8
Element rating (kW)	:	13.8
Electrical supply voltage	:	400V 3N
Required electrical supply (A)	:	21
Electrical current split (A)	:	L1 : 21
		L2 : 21
		L3 : 21

ELECTRIC (AUTO-LIFTER)

Electrical rating (W)	:	2x17
Element rating (W)	:	2x17
Electrical supply voltage	:	2x230V 1N
Required electrical supply (A)	:	0.1

KEY INFORMATION

Unit Dimension (WxDxH)	:	600x750x850/867 mm
Number of heaters	:	6
Max. working temperature	:	100 °C
Bowl capacity (Liters)	:	40 (2x 20 L)
Water inlet connection	:	1/2"
Water drain connection	:	1 1/4"
Direct heat emission	:	0.38 kW
Latent heat emission	:	2.16 kW
Steam emission	:	3.17 kg/h

PACKING DETAILS

Shipping width (mm)	:	660 mm
Shipping depth (mm)	:	840 mm
Shipping height (mm)	:	1010 mm
Shipping volume (m ³)	:	0.559 m ³